


# CRĒDO CUBE™ SERIES 20M PRODUCT SPECIFICATION

## CRĒDO™ SERIES 20M -25°C TO -15°C

Payload Size	Exterior Dimensions - mm	Interior Dimensions - mm	Insulation	Outer Material	Tare Weight - kg
3L	318 x 267 x 279	130 x 130 x 130	Single Wall VIP	White Plastic	7
4L	318 x 267 x 279	150 x 150 x 150	Single Wall VIP	White Plastic	6
4L	381 x 343 x 349	150 x 150 x 150	Nested VIP	White Plastic	10
8L	445 x 286 x 292	282 x 165 x 165	Single Wall VIP	White Plastic	9
10L	381 x 343 x 349	216 x 216 x 216	Single Wall VIP	White Plastic	14
12L	381 x 343 x 349	226 x 226 x 226	Single Wall VIP	White Plastic	12
12L	457 x 419 x 432	226 x 226 x 226	Nested VIP	White Plastic	19
16L	419 x 375 x 381	254 x 254 x 254	Single Wall VIP	White Plastic	14
16L	464 x 432 x 445	254 x 254 x 254	Nested VIP	White Plastic	20
28L	457 x 419 x 432	305 x 305 x 305	Single Wall VIP	White Plastic	20
28L	540 x 495 x 502	305 x 305 x 305	Nested VIP	Kraft Box	30
56L	540 x 495 x 502	381 x 381 x 381	Single Wall VIP	Kraft Box	30
56L	673 x 673 x 641	381 x 381 x 381	Nested VIP	Duracube HD	53
96L	673 x 673 x 641	457 x 457 x 457	Single Wall VIP	Duracube HD	54

Internal / external dimensions may vary subject to approved tolerances.

Series 20M 2896 ISTA Summer Thermal Performance

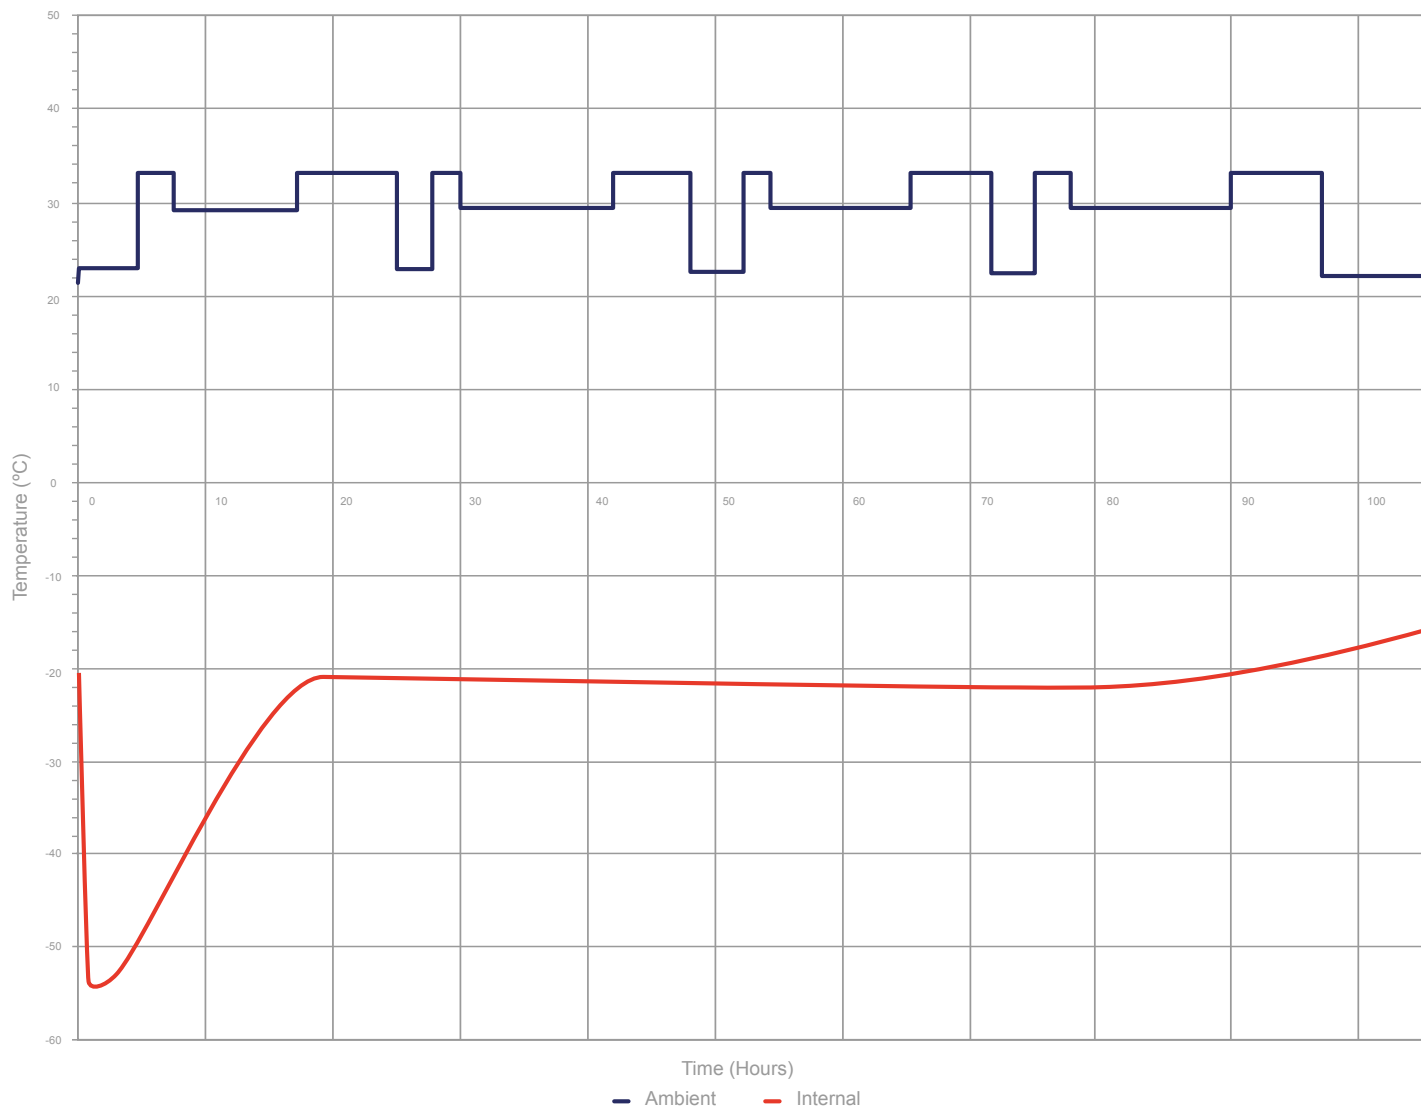


## CRĒDO CUBE™ SERIES 50M (-40°C AND COOLER) PRODUCT SPECIFICATION

Payload Size	Exterior Dimensions - mm	Interior Dimensions - mm	Insulation	Outer Material	Tare Weight - kg
4L	381 x 343 x 349	150 x 150 x 150	Nested VIP	White Plastic	10
12L	457 x 419 x 432	226 x 226 x 226	Nested VIP	White Plastic	19
16L	464 x 432 x 445	254 x 254 x 254	Nested VIP	White Plastic	20
28L	540 x 495 x 502	305 x 305 x 305	Nested VIP	Kraft Box	30
56L	673 x 673 x 641	381 x 381 x 381	Nested VIP	Duracube	54
96L	673 x 673 x 641	457 x 457 x 457	Single Wall VIP	Duracube HD	56

Internal / external dimensions may vary subject to approved tolerances.


Series 50M - 2896, ISTA Summer Thermal Performance

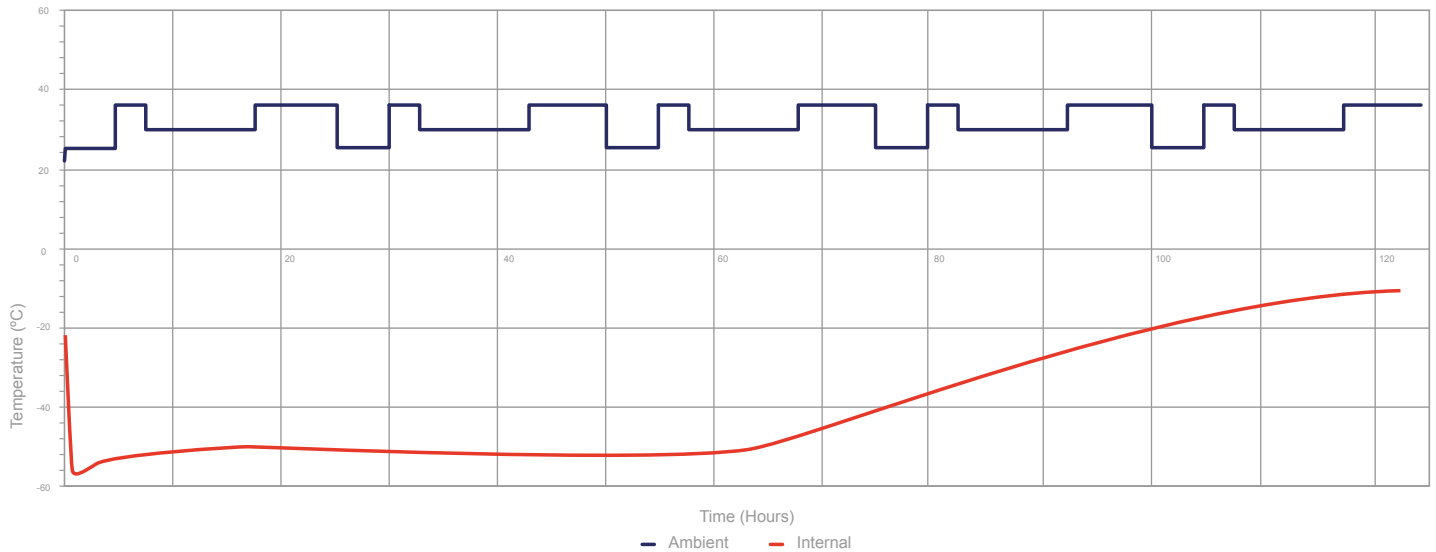

## CREDO CUBE™ DRY ICE (-60°C AND COOLER) PRODUCT SPECIFICATION

Payload Size	Exterior Dimensions - mm	Interior Dimensions - mm	Insulation	Outer Material	Tare Weight - kg	Payload Box - mm
5L	381 x 343 x 389	220 x 220 x 220	Single Wall VIP	White Plastic	4.7	190.5 x 190.5 x 139.7
17L	457 x 419 x 432	299 x 299 x 299	Single Wall VIP	White Plastic	7.4	266.7 x 266.7 x 241.3

Dry Ice 17L ISTA Summer Performance

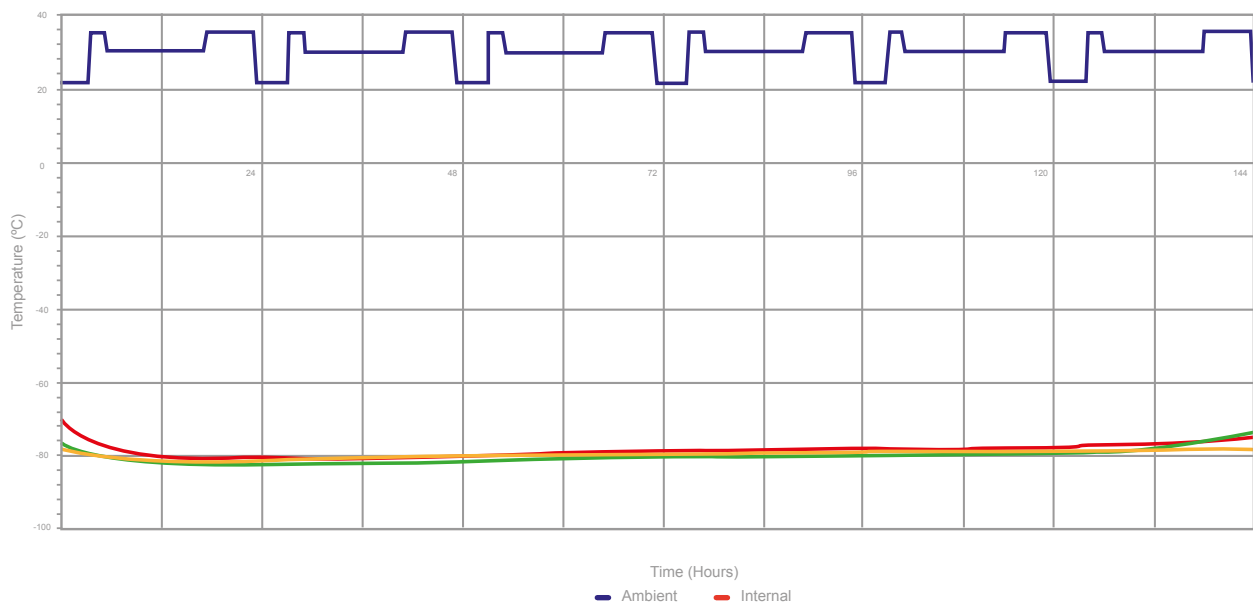

FOR MORE INFORMATION ABOUT PELI BIOTHERMAL PRODUCTS, PLEASE CONTACT:

INFO@PELIBIOTHERMAL.COM T: +44 (0)1525 243 770 PELIBIOTHERMAL.COM

ISO17025, ISO9001-2008 Accredited

Golden Hour™, TIC™, Crêdo™, Crêdo Cube™, Crêdo ProEnvision™, Crêdo Xtreme™, Crêdo Duracube™, Crêdo ProMed™, Sherpa Systems™, CoolGuard™ and CoolPall™ are registered trademarks of Peli BioThermal Ltd., its subsidiaries and/or affiliates.



©2021 PELI BioThermal all rights reserved.



# Crêdo Cube™

## CRÊDO CUBE™ SERIES 4, 22, 20M, 50M AND DRY ICE

Superior thermal protection in a convenient mid-size container.

The Crêdo Cube™ is a passive and reusable shipper qualified to hold chilled medical materials at a safe temperature for up to five days. This system is ideal for reducing shipping costs or for circumstances in which unexpected delays may occur.

Modular TIC™ (Thermal Isolation Chamber) walls with integrated PCM (Phase-Change Material) and VIPs (Vacuum Insulated Panels) makes conditioning in a freezer for year-round shipping easy and allows effortless packing and storage.

### WHY CHOOSE CRÊDO™ SYSTEMS?

- The most trusted and reliable brand of high-performance reusable shippers with the largest number of sizes and temperature ranges available
- TIC™ walls contain PCM and completely enclose the temperature-sensitive payload ensuring consistently stable performance
- Crêdo™ shippers are highly durable, lightweight, and provide an optimum volume ratio of interior payload space for your products - allowing you to ship more product in fewer containers, reducing distribution costs



### ENHANCE YOUR CRÊDO™ SYSTEMS

- **Crêdo ProEnvision™**: Easy-to-use, secure, web-based asset tracking software and global service centers available to assist customers and maximise their return on investment
- **TIC™ Smart Indicator**: Optional temperature-sensitive label installation specifying an “at a glance” safe temperature reading

#### CRÊDO CUBE™

##### DURATION

96 - 168 Hours

##### SERIES 4

(2°C to 8°C)

##### VOLUME

3L, 4L, 8L, 10L, 12L, 16L, 28L, 42L, 56L, 96L

##### SERIES 22 CONTROLLED

(15°C to 25°C)

##### VOLUME

3L, 4L, 8L, 10L, 12L, 16L, 28L, 42L, 56L, 96L

##### SERIES 22 UNIVERSAL

(15°C to 25°C)

##### VOLUME

9L, 24L, 49L

##### SERIES 20M

(-25°C to -15°C)

##### VOLUME

3L, 4L, 8L, 10L, 12L, 16L, 28L, 56L, 96L

##### SERIES 50M

(-40°C and Cooler)

##### VOLUME

4L, 12L, 16L, 28L, 56L, 96L

##### DRY ICE

(-60°C and Cooler)

##### VOLUME


5L, 17L

# CRĒDO CUBE™ SERIES 4 PRODUCT SPECIFICATION

Payload Size	Exterior Dimensions - mm	Interior Dimensions - mm	Insulation	Outer Material	Tare Weight - kg
3L	318 x 267 x 279	130 x 130 x 130	Single Wall VIP	White Plastic	6
4L	318 x 267 x 279	150 x 150 x 150	Single Wall VIP	White Plastic	5
4L	381 x 343 x 349	150 x 150 x 150	Nested VIP	White Plastic	9
8L	445 x 286 x 292	282 x 165 x 165	Single Wall VIP	White Plastic	8
10L	381 x 343 x 349	216 x 216 x 216	Single Wall VIP	White Plastic	11
12L	381 x 343 x 349	226 x 226 x 226	Single Wall VIP	White Plastic	10
12L	457 x 419 x 432	226 x 226 x 226	Nested VIP	White Plastic	16
16L	419 x 375 x 381	254 x 254 x 254	Single Wall VIP	White Plastic	11
16L	464 x 432 x 445	254 x 254 x 254	Nested VIP	White Plastic	17
28L	457 x 419 x 432	305 x 305 x 305	Single Wall VIP	White Plastic	16
28L	540 x 495 x 502	305 x 305 x 305	Nested VIP	Kraft Box	25
42L	616 x 419 x 432	457 x 305 x 305	Single Wall VIP	White Plastic	21
56L	540 x 495 x 502	381 x 381 x 381	Single Wall VIP	Kraft Box	25
96L	673 x 673 x 641	457 x 457 x 457	Single Wall VIP	Duracube HD	46

Internal / external dimensions may vary subject to approved tolerances.

Series 4 - 2896, Unit 3 ISTA Summer Thermal Performance

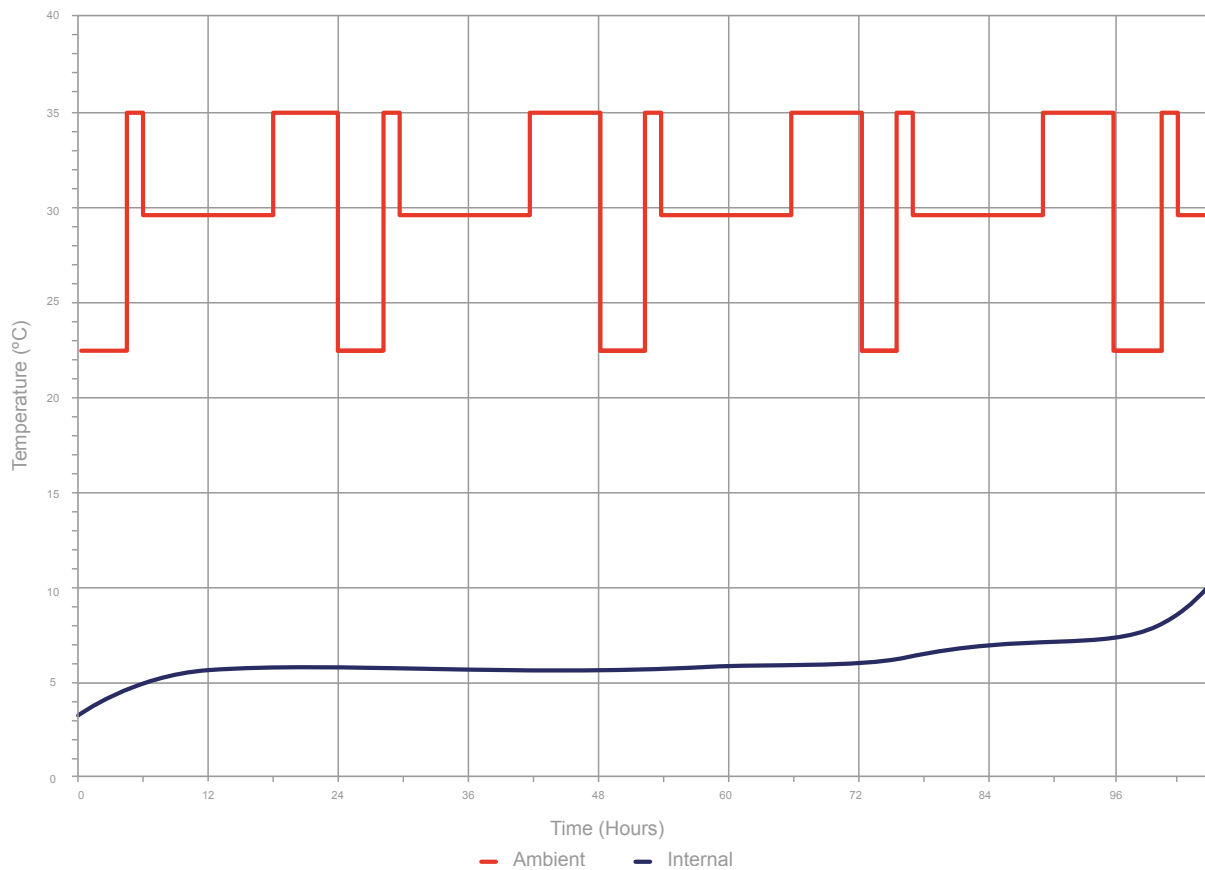

# CRĒDO CUBE™ SERIES 22 CONTROLLED PRODUCT SPECIFICATION

## Controlled


Our standard Series 22 product designed for trips in controlled shipping lanes with a reliable certainty of external temperature during transit.

## CRĒDO™ SERIES 22 CONTROLLED 15°C TO 25°C

Payload Size	Exterior Dimensions - mm	Interior Dimensions - mm	Insulation	Outer Material	Tare Weight - kg
3L	318 x 267 x 279	130 x 130 x 130	Single Wall VIP	White Plastic	6
4L	318 x 267 x 279	150 x 150 x 150	Single Wall VIP	White Plastic	5
4L	381 x 343 x 349	150 x 150 x 150	Nested VIP	White Plastic	9
8L	445 x 286 x 292	282 x 165 x 165	Single Wall VIP	White Plastic	8
10L	381 x 343 x 349	216 x 216 x 216	Single Wall VIP	White Plastic	11
12L	381 x 343 x 349	226 x 226 x 226	Single Wall VIP	White Plastic	10
12L	457 x 419 x 432	226 x 226 x 226	Nested VIP	White Plastic	16
16L	419 x 375 x 381	254 x 254 x 254	Single Wall VIP	White Plastic	11
16L	464 x 432 x 445	254 x 254 x 254	Double Wall VIP	White Plastic	17
28L	457 x 419 x 432	305 x 305 x 305	Single Wall VIP	White Plastic	16
28L	540 x 495 x 502	305 x 305 x 305	Nested VIP	Kraft Box	25
42L	616 x 419 x 432	457 x 305 x 305	Single Wall VIP	White Plastic	21
56L	540 x 495 x 502	381 x 381 x 381	Single Wall VIP	Kraft Box	24
96L	673 x 673 x 641	457 x 457 x 457	Single Wall VIP	Duracube HD	46

Internal / external dimensions may vary subject to approved tolerances.

Series 22 Controlled - 2896 ISTA Summer Thermal Performance

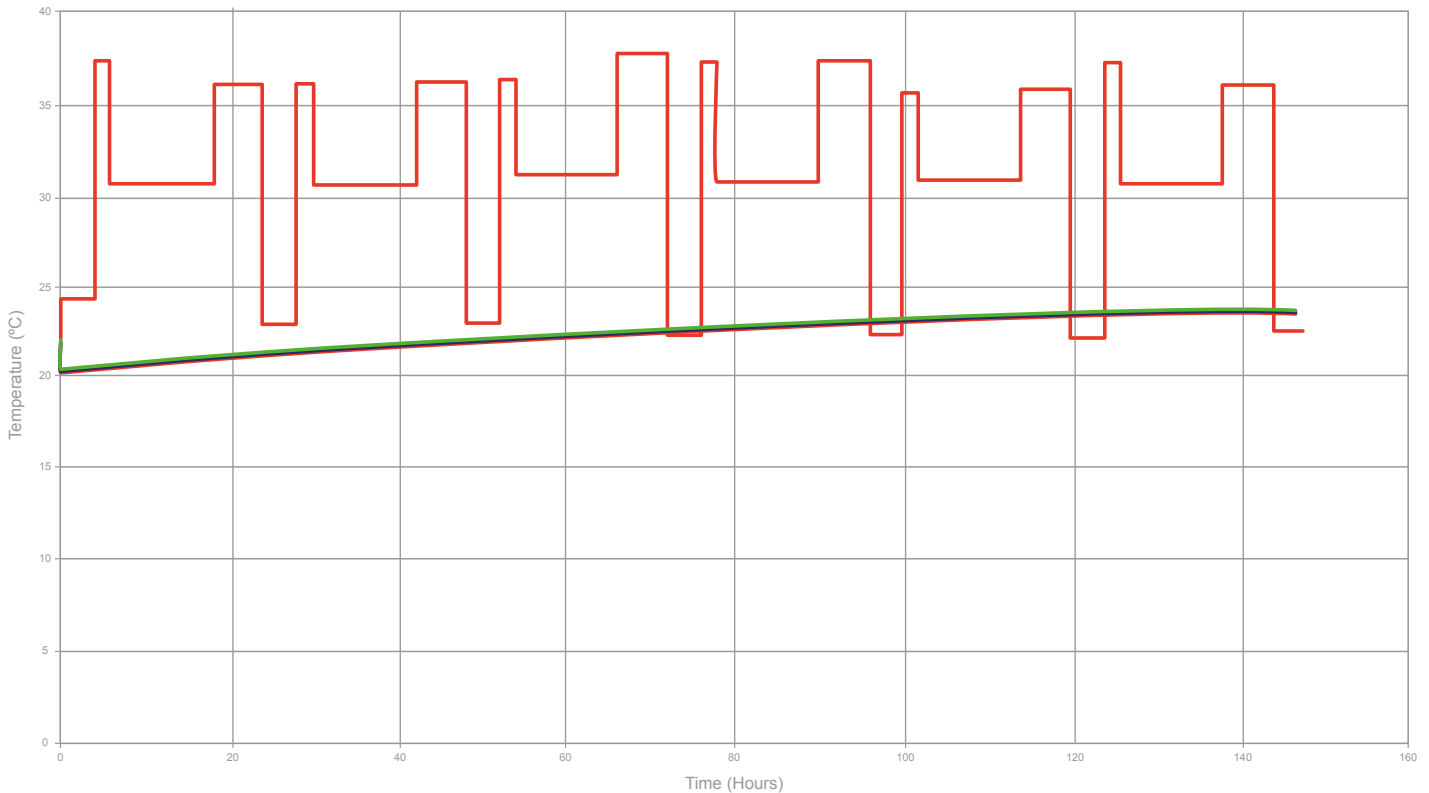

## CRĒDO CUBE™ SERIES 22 UNIVERSAL PRODUCT SPECIFICATION

### Universal

Series 22 Universal has been specially designed for more challenging shipping lanes, which could feature a wide variance of temperature during the trip duration.

### CRĒDO™ SERIES 22 UNIVERSAL 15°C TO 25°C

Payload Size	Exterior Dimensions - mm	Interior Dimensions - mm	Insulation	Outer Material	Tare Weight - kg
9L	381 x 343 x 349	206 x 206 x 206	Single Wall VIP	White Plastic	11
24L	457 x 419 x 432	291 x 291 x 291	Single Wall VIP	White Plastic	19
49L	540 x 495 x 502	366 x 366 x 366	Single Wall VIP	White Plastic	27

Internal / external dimensions may vary subject to approved tolerances.



Series 22 Universal - 9L, Unit 3, ISTA Summer Thermal Performance

