




**PELI**  
**BIO THERMAL™**

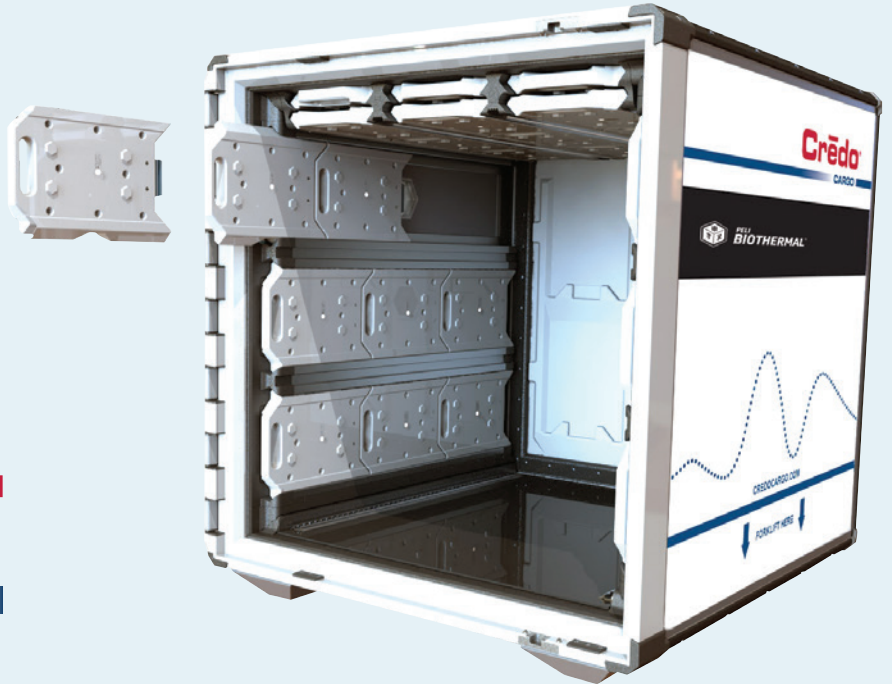

# Crēdo™

## CARGO

### THE HIGH PERFORMANCE REUSABLE BULK SHIPPER

#### WHY CHOOSE CRĒDO™ CARGO?

- Reusable pallet shipper utilising PCM coolants
- Consistent temperature stability in excess of 120 - 144+ hours
- Easy-to-use coolant loading system
- Single door access with 270°C opening
- Lightweight & sturdy design with tough external wall construction to absorb and deflect impacts
- Designed to be stackable for easy storage
- Integral viewing windows to monitor condition of VIPs

Available via the Crēdo™ On Demand rental programme



FOR MORE INFORMATION ABOUT PELI BIOTHERMAL PRODUCTS, PLEASE CONTACT:

EMEA OFFICE - INFOEMEA@PELIBIOTHERMAL.COM T: +44 (0)1525 243 770

AMERICAS OFFICE - INFOAMERICAS@PELIBIOTHERMAL.COM T: +1(763) 412-4800 TOLL FREE US: T: +(877) 537-9800

ASIA OFFICE - INFOASIA@PELIBIOTHERMAL.COM T: +65 6681 0095

PELIBIOTHERMAL.COM

ISO17025, ISO9001-2008 Accredited

Golden Hour™, TIC™, Crēdo™, Crēdo Cube™, Crēdo ProEnvision™, Crēdo Xtreme™, Crēdo Duracube™, Crēdo ProMed™, Sherpa Systems™, CoolGuard™ and CoolPall™ are registered trademarks of Pelican Products Inc., its subsidiaries and / or affiliates

©2021 Peli BioThermal Ltd all rights reserved

#### TEMPERATURE RANGE

**2°C to 8°C** Chilled

**15°C to 25°C** Ambient

**-20°C** Frozen

#### DURATION

120 - 144+ hours  
(ISTA 7D)

#### OUTER DIMENSIONS

1560 x 1525 x 1600mm

#### PAYLOAD DIMENSIONS

1295 x 1085 x 1200mm

#### VOLUME

1686L

#### MAX PAYLOAD

1000KG

#### TARE WEIGHT

**584KG** 2°C to 8°C

**582KG** 15°C to 25°C

**667KG** -20°C